


Abrasive sponge, flexible, coated on 1 side

SW 512

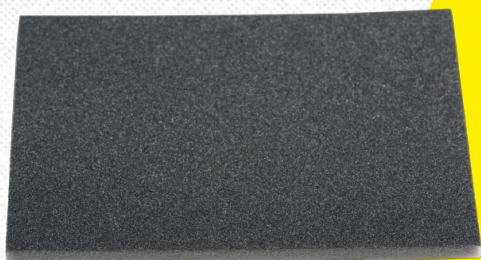

Properties

Grain	SiC
Coating	Close

Product benefit

Thin, ultra flexible sanding sponge for particularly hard-to-reach areas such as indentations, profiles and edges - Tight foam structure, allowing for exceptionally uniform pressure distribution and an extra fine finish - No bending, no creases - Can be used wet and dry - Sharp-edged silicon carbide for increased aggressiveness and processing of hard-to-machine materials

Application

Paint/Varnish/Filler	●
Plastic	●
Wood	○
Metal	○

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length x Height	Density	grain	Density	Grit color	Foam color	Article number
4-1/2 x 5-1/2 x 3/16	hard	120	hard	black	gray	337850
4-1/2 x 5-1/2 x 3/16	hard	180	hard	black	gray	337851
4-1/2 x 5-1/2 x 3/16	hard	220	hard	black	gray	337852
4-1/2 x 5-1/2 x 3/16	hard	320	hard	black	gray	337853

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
 Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
 sales@klingspor.de - www.klingspor.de

