


Abrasive fibre disc, multibond

FS 966 ACT

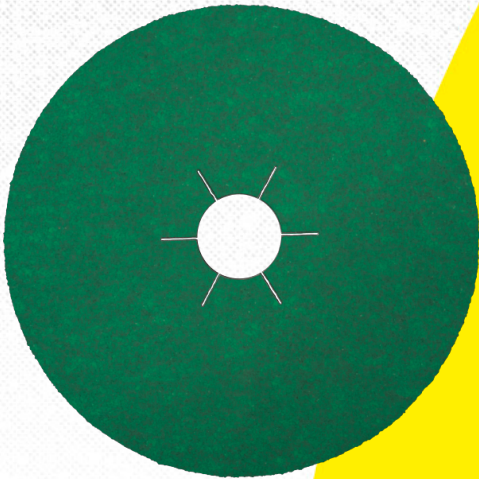

Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Product benefit

Micro-crystalline self-sharpening effect - High aggressiveness throughout the service life - Outstanding grit adhesion - Long service life, especially suitable for heavy-duty applications - Increase in performance due to low temperatures - Multibond prevents heat tinting

Materials

Stainless steel ●

Applications

- Stainless steel processing industry
- Apparatus and container manufacturing

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Diameter x Hole	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Article number
4-1/2 x 7/8 X-LOCK	⊙ 50	80	80 m/s	13300 rpm	FS 966	X-LOCK	351165
4-1/2 x 7/8 X-LOCK	⊙ 50	40	80 m/s	13300 rpm	FS 966	X-LOCK	351166
4-1/2 x 7/8 X-LOCK	⊙ 50	60	80 m/s	13300 rpm	FS 966	X-LOCK	351167
4-1/2 x 7/8	⊗ 30	36	80 m/s	13300 rpm	FS 966	star shaped hole	316490
4-1/2 x 7/8	⊗ 30	40	80 m/s	13300 rpm	FS 966	star shaped hole	316491
4-1/2 x 7/8	⊗ 30	60	80 m/s	13300 rpm	FS 966	star shaped hole	316492

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de



Diameter x Hole	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Article number
4-1/2 x 7/8	⊗ 30	80	80 m/s	13300 rpm	FS 966	star shaped hole	316493
4-1/2 x 7/8	⊗ 30	50	80 m/s	13300 rpm	FS 966	star shaped hole	318504
4-1/2 x 7/8	⊗ 30	24	80 m/s	13300 rpm	FS 966	star shaped hole	318532
4-1/2 x 7/8	⊗ 30	120	80 m/s	13300 rpm	FS 966	star shaped hole	324237
5 x 7/8 X-LOCK	⊗ 50	80	80 m/s	12200 rpm	FS 966	X-LOCK	351162
5 x 7/8 X-LOCK	⊗ 50	60	80 m/s	12200 rpm	FS 966	X-LOCK	351163
5 x 7/8 X-LOCK	⊗ 50	40	80 m/s	12200 rpm	FS 966	X-LOCK	351164
5 x 7/8	⊗ 30	36	80 m/s	12200 rpm	FS 966	star shaped hole	316494
5 x 7/8	⊗ 30	40	80 m/s	12200 rpm	FS 966	star shaped hole	316495
5 x 7/8	⊗ 30	60	80 m/s	12200 rpm	FS 966	star shaped hole	316496
5 x 7/8	⊗ 30	80	80 m/s	12200 rpm	FS 966	star shaped hole	316497
5 x 7/8	⊗ 30	24	80 m/s	12200 rpm	FS 966	star shaped hole	318305
5 x 7/8	⊗ 30	120	80 m/s	12200 rpm	FS 966	star shaped hole	324239
7 x 7/8	⊗ 30	36	80 m/s	8500 rpm	FS 966	star shaped hole	316498
7 x 7/8	⊗ 30	40	80 m/s	8500 rpm	FS 966	star shaped hole	316499
7 x 7/8	⊗ 30	60	80 m/s	8500 rpm	FS 966	star shaped hole	316501
7 x 7/8	⊗ 30	80	80 m/s	8500 rpm	FS 966	star shaped hole	316502
7 x 7/8	⊗ 30	24	80 m/s	8500 rpm	FS 966	star shaped hole	318352
7 x 7/8	⊗ 30	120	80 m/s	8500 rpm	FS 966	star shaped hole	324238

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

